

MARINE PRODUCTS 2015 *Simply the Best*





VHF Handheld Transceivers



- Supplied Accessories**
- Battery pack, BP-266
 - Battery charger, BC-199SA/SE*
 - Belt clip, MB-124
 - Antenna, FA-SC58V
 - Hand strap
 - * Depending on version

VHF MARINE TRANSCEIVER IC-M24

Float 'n Flash, Small and Lightweight Floating VHF



FEATURES

- Float 'N Flash
- Energy-saving 3.7V circuitry
- Volume boost and mute functions
- Direct charging circuitry
- 10 hours of operating time

• Dual watch and Tri-watch functions • Instant access to Ch 16 and Ch 9 • Weather alert functions (USA version only) • AquaQuake™ draining function • 2-step power save • Auto scan function • Tag scan and favorite channel function



- Supplied Accessories**
- Battery pack, BP-252
 - Battery charger, BC-173
 - AC adapter, BC-147SA/SE*
 - Belt clip, MB-109
 - Antenna, FA-SC58V
 - Hand strap
 - * Depending on version

VHF MARINE TRANSCEIVER IC-M36

Clear Voice Boost and it Floats!



FEATURES

- Noise cancelling microphone
- Automatic volume adjustment
- Volume boost and mute functions
- Large buttons and slim dimensions
- 6W RF output, 700mW loud audio

• Dual watch and Tri-watch functions • Instant access to Ch 16 and Ch 9 • Weather alert functions (USA version only) • AquaQuake™ draining function • 2-step power save • Auto scan function • Tag scan and favorite channel function • Optional speaker-microphone, HM-165




- Supplied Accessories**
- Battery pack, BP-245H
 - Battery charger, BC-210
 - AC adapter, BC-123SA/SE*
 - Belt clip, MB-103
 - Antenna, FA-S59V or FA-S64V*
 - Cigarette lighter cable, CP-25H*
 - Hand strap
 - * Depending on version.
Photo shows FA-S59V antenna version.

VHF MARINE TRANSCEIVERS

IC-M73 PLUS IC-M73

Slim, Stylish and Powerful VHF with Professional Features

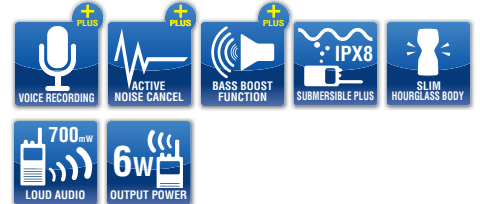

FEATURES

- Last Call voice recording*
- Active noise cancelling*
- Bass Boost function*
- IPX8 Submersible Plus™
- 6W RF output, 700mW loud audio

• Dual watch and Tri-watch functions • Instant access to Ch 16 and call channel • Weather alert functions (USA version only) • AquaQuake™ draining function • Auto power save • Priority and normal scan • Tag scan and favorite channel function • Optional speaker-microphones, HM-167/HM-202

* Available in IC-M73 PLUS version only.



VHF Handheld Transceivers



Supplied Accessories

- Battery pack, BP-275
- Battery charger, BC-204
- AC adapter, BC-147SA/SE*
- Cigarette lighter cable, CP-25
- Belt clip, MB-109
- Antenna, FA-SC59V
- Hand strap
- * Depending on version

VHF MARINE TRANSCEIVER IC-M92D

The World's First Active Noise Cancelling Handheld with DSC, GPS and MOB



FEATURES

- Intuitive user interface
- Active noise cancelling
- Built-in GPS with GPS compass
- Built-in DSC for handheld
- MOB and waypoint memories
- Dual watch and Tri-watch functions
- Instant access to Ch 16 and call channel
- Weather alert functions (USA version only)
- AquaQuake™ draining function
- Auto power save
- Priority and normal scan
- Tag scan and favorite channel function
- Optional speaker-microphone, HM-167/HM-202



Supplied Accessories

- Battery pack, BP-227/BP-274*
- Battery charger, BC-152N
- AC adapter, BC-147SA/SE*
- Belt clip, MB-86
- Antenna, FA-S59V
- Hand strap
- * Depending on version

VHF MARINE TRANSCEIVER IC-M88

Compact Size for Commercial or Recreational Use



FEATURES

- Tough and compact body
- Marine and land channel groups
- 22 programmable land channels
- Built-in CTCSS and DTCS tones
- Dual watch and Tri-watch functions
- Instant access to Ch 16 and Ch 9
- Weather alert functions (USA version only)
- Auto power save
- Auto scan function
- Tag scan function
- Optional speaker-microphone, HM-168



Supplied Accessories

- Battery pack, BP-224
- Battery charger, BC-158
- AC adapter, BC-147SA/SE*
- Belt clip, MB-103Y
- Antenna, FA-S61V (Fixed type)
- Neck strap
- * Depending on version

SURVIVAL CRAFT 2-WAY RADIO IC-GM1600










GMDSS Portable for Survival Craft












FEATURES









- Meets strict environmental requirements for GMDSS
- 2W output power for long lasting battery
- Primary (non-rechargeable) lithium battery pack, BP-234
- Highly visible yellow colored body
- Instant access to Ch 16 and Call channel
- Auto power save
- 4-step battery indicator

Options for VHF Handheld Transceivers

MODEL NAME	BATTERY CASES				BATTERY PACKS				
	BP-226 LR6 (AA)×5 cells	BP-251*1 LR03 (AAA)×5 cells	BP-224 (Ni-Cd) 7.2V/750mAh	BP-227 (Li-ion) 7.4V/1850mAh (min.) 1950mAh (typ.)	BP-234 (Lithium) 9.0V/3300mAh (non-rechargeable)	BP-245H (Li-ion) 7.2V/2150mAh (min.) 2200mAh (typ.)	BP-252 (Li-ion) 7.4V/950mAh (min.) 980mAh (typ.)	BP-266 (Li-ion) 3.7V/1500mAh (min.) 1590mAh (typ.)	BP-274 (Li-ion) 7.4V/1800mAh (min.) 1900mAh (typ.)
IC-M24									
IC-M36		✓					✓	✓	
IC-M73						✓			
IC-M92D									
IC-M88	✓			✓					✓
IC-GM1600			(On-board use only)		(For survival craft)				

*1 The IC-M36 floats when used with most common brand AAA batteries. Battery weight varies by manufacturer. Please check your IC-M36 for buoyancy in a shallow area first when using AAA batteries.

MODEL NAME	BATTERY PACKS	DESKTOP CHARGERS							
		BC-119N Rapid charger	BC-152N Regular charger	BC-158 Regular charger (For BP-224)	BC-162 Rapid charger	BC-173 Regular charger	BC-204 Regular charger	BC-205 Rapid charger	BC-210 Rapid charger
IC-M24									
IC-M36		✓ (Use with AD-123)			✓	✓			
IC-M73									✓
IC-M92D	✓						✓	✓	
IC-M88		✓ (Use with AD-100)	✓						
IC-GM1600		✓ (Use with AD-109 On-board use only)		✓ (On-board use only)					

MODEL NAME	MULTI-CHARGERS		AC ADAPTERS				WALL CHARGER	CHARGER ADAPTERS
	BC-121N Rapid charger	BC-197 Rapid charger	BC-123S*2 12V/1A	BC-145S*2 16V/0.93A	BC-147S*2 12V/200mA	BC-157S 12V/6.6A	BC-199S*2 Regular charger	AD-100 AD-109 AD-123 AD-124*3 AD-129*3
IC-M24								
IC-M36			✓ (Use with BC-162)	✓ (Use with BC-162)	✓ (Use with BC-173)		✓	✓ (Use AD-123 with BC-119N)
IC-M73		✓ (Use with AD-129)	✓ (Use with BC-210)			✓ (Use with BC-197)		✓ (Use AD-129 with BC-197)
IC-M92D		✓ (Use with AD-124)	✓ (Use with BC-205)		✓ (Use with BC-204)	✓ (Use with BC-197)		✓ (Use AD-124 with BC-197)
IC-M88	✓ (Use with AD-100)			✓ (Use with BC-119N)	✓ (Use with BC-152N)	✓ (Use with BC-121N)		✓ (Use AD-100 with BC-119N/121N)
IC-GM1600	✓ (Use with AD-109 On-board use only)			✓ (Use with BC-119N, On-board use only)	✓ (Use with BC-158, On-board use only)	✓ (Use with BC-121N, On-board use only)		✓ (Use AD-109 with BC-119N/121N On-board use only)










*2 BC-123/BC-145/BC-147/BC-199SA for 120V AC. SE for 230V AC. SV for 240V AC.


*3 Either AD-124 or AD-129 is supplied with BC-197, depending on version.

: Applicable : Not applicable

Some options may not be available in some countries. Please ask your dealer for details.

Options for VHF Handheld Transceivers

MODEL NAME	CIGARETTE LIGHTER CABLES			DC POWER CABLES		SPEAKER MICROPHONES			
	CP-23L	CP-24	CP-25/H	OPC-515L	OPC-656	HM-138 Submersible	HM-165 Submersible	HM-167 Submersible	HM-168 Submersible
									
IC-M24		✓							
IC-M36							✓		
IC-M73			✓	✓	✓			✓	
IC-M92D	✓ (Use with BC-205)		✓ (Use CP-25H with BC-210) (Use CP-25 with BC-204)	✓ (Use with BC-210)	✓ (Use with BC-197)			✓	
IC-M88	✓ (Use with BC-119N/152N)			✓ (Use with BC-205)	✓ (Use with BC-197)	✓		✓	
IC-GM1600	✓ (Use with BC-119N/158, On-board use only)			✓ (Use with BC-119N/152N)	✓ (Use with BC-121N)				✓

MODEL NAME	SPEAKER MICROPHONES	BELT CLIPS		LEATHER BELT HANGERS			ANTENNAS
	HM-202 Submersible	MB-86 Swivel type	MB-98 MB-103/103Y MB-109 MB-124 Alligator	MB-96N Swivel type	MB-96F Fixed type	MB-F96FL Long type	FA-S59V FA-S64V FA-SC58V FA-SC59V
			 Photo shows MB-109				 FA-S59V (left) & FA-S64V (right)
IC-M24			✓ (Use MB-124)				FA-SC58V
IC-M36			✓ (Use MB-109)				FA-SC58V
IC-M73	✓	✓	✓ (Use MB-103)	✓	✓	✓	FA-S59V or FA-S64V
IC-M92D	✓		✓ (Use MB-109)		✓	✓	FA-SC59V
IC-M88		✓	✓ (Use MB-98)	✓	✓	✓	FA-S59V
IC-GM1600		✓	✓ (Use MB-103Y)	✓	✓	✓	Fixed type

: Applicable
 : Not applicable

Some options may not be available in some countries. Please ask your dealer for details.

Specifications

	IC-M24	IC-M36	IC-M73	IC-M92D	IC-M88	IC-GM1600
Frequency range (Unit: MHz)	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275, 146–174 (LMR; Tx/Rx)	156.300–156.875 (Tx/Rx)
Dimensions (projections not included; W×H×D)	58.5×128.5×34.5 mm; 2.3×5.06×1.36 in	62×139.5×43 mm; 2.44×5.49×1.69 in	52.5×125×30 mm; 2.07×4.92×1.18 in	61.2×141.4×43.2 mm; 2.41×5.57×1.7 in	62×97×39 mm; 2.44×3.82×1.54 in	65×145×44 mm; 2.56×5.71×1.73 in
Weight (approx.)	260g; 9.2oz (With BP-266, MB-124 and FA-SC58V)	295g; 10.4oz (With BP- 252, MB-109 and FA-SC58V)	320g; 11.3oz (With BP- 245H, MB-103 and FA-S59V)	280g; 9.9oz (With BP-275, MB-109 and FA-SC59V)	280g; 9.9oz (With BP-227)	385g; 13.6oz (With BP-234)
Current drain	Transmit (High)	2.3A typical (at 3.7V DC)	1.5A typical	1.5A typical	1.5A typical	1.6A typical
	Max. audio	350mA typical	300mA typ. (Internal SP)	250mA typ. (External SP) 450mA typ. (Internal SP)	300mA typ. (External SP) 500mA typ. (Internal SP)	200mA typical
Sensitivity (at 12dB SINAD)	0.25µV typical	0.25µV typical	0.22µV typical	0.25µV typical	0.25µV typical	0.25µV typ. (USA version)
Intermodulation rejection	70dB typical	70dB typical	70dB typical	70dB typical	70dB typical	70dB (USA), 68dB (GEN)
Audio output power (10% distortion/ 8Ω load)	600mW typical	700mW typ. (Internal SP, 16Ω load)	700mW typ. (Internal SP) 350mW typ. (External SP)	700mW typ. (Internal SP) 350mW typ. (External SP)	350mW typical	350mW typical
RF output power	5/1W (approx.)	6/1W (With BP-252) 2/1W (With alkaline cells)	6/3/1W	5/1W	5/3/1W	2/1W
Operating time (approx.)	10 hours (with BP-266)	8 hours (with BP-252)	PLUS version 17 hours Basic version 20 hours (with BP-245H)	8 hours (with BP-275)	15 hours (with BP-227)	Specified as IMO A.809 (19)


Measurements made in accordance with TIA/EIA603 for IC-M24, M36, M73, M92D and M88. TIA/EIA603 and FCC Part 80.271 for IC-GM1600.




VHF Fixed Mount Transceivers

VHF MARINE TRANSCEIVER **IC-M506**

Fixed Mount VHF and AIS Receiver Combo with NMEA 2000™ Connectivity



AIS plotter



AIS target list



Functions menu



HM-195B
COMMANDMIC,
HM-195 series capable



FEATURES

- **Integrated AIS receiver***
- **NMEA 2000™ connectivity***
- **2 minutes Last Call voice recording**
- **Intuitive user interface**
- **Active noise cancelling**
- **15W loud audio and 25W two-way hailer**
- **Optional COMMANDMIC™, HM-195 series**
- **IPX8 Submersible Plus™ (1m depth for 60 minutes)**
- **Dual watch and Tri-watch functions**
- **Instant access to Ch 16 and Call channel**
- **Weather alert functions (USA version only)**
- **Tag scan and favorite channel functions**
- **AquaQuake™ draining function**
- **Auto scan function**
- **Display and keypad backlighting**
- **External speaker connection**
- **Option voice scrambler UT-112**
- **Large dot-matrix display**
- **Rear panel microphone version**

* AIS receiver, NMEA 2000™ interface units are options, depending on version.

VHF MARINE TRANSCEIVER **IC-M424G** (With GPS Receiver)

Easy-to-Use and Even Easier to Hear



HM-195GW
COMMANDMIC,
HM-195 series capable

FEATURES

- **Intuitive user interface**
- **Active noise cancelling**
- **10W loud audio, public address and foghorn**
- **Optional COMMANDMIC™, HM-195 series**
- **IPX7 submersible**
- **Black and Super White color versions**
- **Integrated GPS receiver simplifies wiring**
- **Dual watch and Tri-watch functions**
- **Instant access to Ch 16 and Call channel**
- **Weather alert functions (USA version only)**
- **Tag scan and favorite channel functions**
- **AquaQuake™ draining function**
- **Auto scan function**
- **Display and keypad backlighting**
- **External speaker connection**
- **RX speaker function**



VHF Fixed Mount Transceivers

VHF MARINE TRANSCEIVER

IC-M400BB

Black Box Transceiver When Space is at a Premium



IC-M400BB and HM-195B

FEATURES

- Space-saving, fully functional VHF/DSC
- Controlled by COMMANDMIC™ HM-195 series*
- Intuitive user interface
- Active noise cancelling
- 10W loud audio, public address and foghorn
- IPX7 submersible (Both IC-M400BB and HM-195 series)
- Dual watch and Tri-watch functions
- Instant access to Ch 16 and Call channel
- Weather alert functions (USA version only)
- Tag scan and favorite channel functions
- AquaQuake™ draining function
- Auto scan function
- Display and keypad backlighting
- External speaker connection
- RX speaker function

* HM-195 series may be sold separately, depending on version.

VHF MARINE TRANSCEIVER

IC-M324G

(With GPS Receiver)



IC-M324G

VHF MARINE TRANSCEIVER

IC-M324

(Without GPS Receiver)



IC-M324

Top Performance, Great Value



(IC-M324G only)

FEATURES

- Powerful, compact VHF/DSC with Icom value and reliability
- Intuitive user interface
- High-definition dot-matrix display
- Class D DSC
- Integrated GPS receiver (IC-M324G only)
- IPX7 waterproof
- Dual watch and Tri-watch functions
- Instant access to Ch 16 and Call channel
- Tag scan and favorite channel functions
- AquaQuake™ draining function
- Auto scan function
- Display and keypad backlighting
- External speaker connection
- Black and Super White color versions



COMMANDMIC™

REMOTE-CONTROL MICROPHONES

HM-195GB/GW

(White Backlight LCD)

HM-195B/SW

(Amber Backlight LCD)



HM-195GW



FEATURES

- Full control 2nd station capability for IC-M506 or M424G
- Remote-controller head for IC-M400BB
- Intercom function with IC-M506 or M424G
- Intuitive user interface
- Up to 18.3m (60.3ft) remote location installation*
- Choose between white or amber backlight, key backlighting variation
- Black and Super White color versions
- * Two optional OPC-1541 extension cables required



VHF Fixed Mount Transceiver

VHF MARINE TRANSCEIVER

IC-M604A

REMOTE-CONTROL MICROPHONE

HM-162B

High Grade VHF! DSC, Hailer, 2nd/3rd Station Capability



IC-M604A and optional COMMANDMIC™, HM-162B



FEATURES

- 5.0W typical loud audio and superior receiver performance
- Large dot-matrix LCD and numeric keypad for easy operation
- Front and rear panel microphone connection
- RX speaker, "receiver-repeater" function
- 30W two-way hailer and automatic foghorn
- 2nd/3rd station capability with optional COMMANDMIC™, HM-162B*
* Two units available.
- IPX7 submersible (Both IC-M604A and COMMANDMIC™, HM-162B)
- Dual watch and Tri-watch functions
- Instant access to Ch 16 and Ch 9
- Weather alert functions (USA version only)
- Tag scan and favorite channel functions
- AquaQuake™ draining function
- Priority and normal scan function
- Option voice scrambler UT-112
- Display and keypad backlighting
- Intercom function with transceiver or between COMMANDMIC™
- Black and Gray color versions (IC-M604A)



AIS Transponder and AIS Receiver



CLASS B AIS TRANSPONDER

MA-500TR

Fully Capable Class B AIS Transponder



* Option for IC-M324G, IC-M324, IC-M424G, IC-M400BB, IC-M506, IC-M604A and MR-1210

FEATURES

- Class B AIS transponder
- Large full dot-matrix display
- CPA and TCPA collision-risk management
- AIS target call with Icom VHF transceiver
- 100 waypoint memories
- 3-line NMEA input/output
- MXG-5000S GPS receiver*

* The MXG-5000S may be sold separately, depending on country.



MXG-5000S GPS receiver



AIS RECEIVER

MXA-5000

Real-Time Vessel Traffic Information for Collision-Risk Management



* Option for MR-1210

FEATURES

- Monitors Class A and Class B AIS data
- Dual mode data output (GPS chart plotter and PC connection)
- Built-in antenna splitter to share one VHF antenna
- GPS data multiplex
- Compact size, 132(W)x34(H)x155(D) mm dimensions



HF Marine Transceiver

HF MARINE TRANSCEIVER

IC-M802

Advanced DSP Marine SSB with Compact Remote Head



Photo shows the IC-M802 U.S.A. version.



FEATURES

- Wideband receiver coverage (0.5–29.9999MHz)
- Large dot-matrix display
- One-touch e-mail access button*
* USA version only. Please consult with an HF e-mail provider for details.
- Built-in 2-tone (2182kHz) alarm function
* General version only.
- Flexible filter settings with built-in DSP
- Optional antenna tuner, AT-140
- 150W (PEP) powerful output
- Built-in Class E DSC (Meets ITU-R M.493-13)*
* USA version only.
- DIN and RS-232C connectors for external equipment



Marine Radars

COLOR TFT MARINE RADARS

MR-1210RII MR-1210TII MR-1210TIII



Open Scanner for MR-1210TII/TIII



Radome Scanner for MR-1210RII



12.1-inch Color TFT Marine Radar



FEATURES

- 12.1-inch color TFT display (600x800 dots)
- Three types of scanner units
MR-1210RII : 36NM range, 4kW radome scanner
MR-1210TII : 48NM range, 4kW open array scanner
MR-1210TIII : 72NM range, 6kW open array scanner
- Intuitive user interface
- AIS overlay and favorite AIS functions (External AIS data required separately)
- Simplified ATA (Automatic Tracking Aid) function
- Stabilized head up mode* (* External heading sensor required.)
- Optional Video Output Unit, UX-234 for connection with an external display
* MR-1210 marine radar is not available in the USA.


Credits: This product includes "zlib", "libevent", "libusb" and "freetype" open source software, and is licensed according to the open source software license.

Options


MODEL NAME	HAND MICROPHONES				COMMANDMIC™			EXTENSION CABLES	
	HM-205B/RB/SW Speaker microphone	HM-200B/SW	HM-126RB/RG Speaker microphone	HM-135	HM-195B/SW	HM-195GB/GW	HM-162B/SW	OPC-1000 6.1m; 20ft cable for use with rear microphone connection.	OPC-1541 6.1m; 20ft cable for use with COMMANDMIC
IC-M506	✓				✓	✓		✓ (For use with rear mic version)	✓ (Use with COMMANDMIC)
IC-M424G	✓				✓	✓			✓ (Use with COMMANDMIC)
IC-M400BB					✓	✓			✓ (Use with COMMANDMIC)
IC-M324G		✓							
IC-M324		✓							
IC-M604A			✓				✓	✓	✓ (Use with COMMANDMIC)
IC-M802				✓					

MODEL NAME	SHIELDED CONTROL CABLES	SEPARATION CABLE	FLUSH MOUNT KITS	VOICE SCRAMBLER	AIS RECEIVER UNIT	NMEA 2000 INTERFACE		
	OPC-566 10m; 32.8ft	OPC-1147/N 10m; 32.8ft	OPC-1106 5m; 16.4ft	MB-132	MB-75	UT-112 Total of 32 voice scramble codes available	UX-231	UX-232
IC-M506				✓	✓	✓	✓* (Installed, depending on version)	✓* (Installed, depending on version)
IC-M424G				✓				
IC-M400BB								
IC-M324G				✓				
IC-M324				✓				
IC-M604A					✓			
IC-M802	✓ (Use with AT-130)	✓ (Use with AT-140)	✓		✓			

* See configuration chart below.

MODEL NAME	FOLDED DIPOLE ANTENNA	ANTENNA MATCHERS	ANTENNA TUNERS	EXTERNAL SPEAKER	REMOTE CONTROLLER		
	AH-710 	MN-100	MN-100L	AT-130	AT-140 IP56	SP-24	RC-25
IC-M506							
IC-M424G							
IC-M400BB							
IC-M324G							
IC-M324							
IC-M604A							
IC-M802	✓	✓	✓	✓	✓	✓	✓

OPTIONS FOR MARINE RADARS

MODEL NAME	VIDEO OUTPUT UNIT	SYSTEM CABLES	
	UX-234 	OPC-2339 20m(65.6ft)	OPC-2340 30m(98.4ft)
MR-1210RII	✓	✓	✓
MR-1210TII/TIII	✓		✓

: Applicable
 : Not applicable

Some options may not be available in some countries. Please ask your dealer for details.

IC-M506 Configuration Variations

	Microphone	NMEA 2000	AIS Receiver
IC-M506 AIS	Front Mic	NMEA 2000/ NMEA 0183	Integrated AIS Receiver
	Rear Mic		
IC-M506 PLUS	Front Mic	NMEA 2000/ NMEA 0183	Not included* ²
	Rear Mic		
IC-M506	Front Mic	NMEA 0183* ¹	Not included* ²

*¹ Optional UX-232 is required for NMEA 2000.

*² Optional UX-231 is required for AIS receiver.

Specifications

VHF FIXED MOUNT TRANSCEIVERS

	IC-M506	IC-M424G	IC-M400BB	IC-M324G	IC-M324	IC-M604A
Frequency range (Unit: MHz)	Tx: 156.025–157.425 Rx: 156.050–163.275 AIS1,2 161.975, 162.025	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275	Tx: 156.025–157.425 Rx: 156.050–163.275
Power supply requirement	13.8V DC ±15%	13.8V DC ±15%	13.8V DC ±15%	13.8V DC ±15%	13.8V DC ±15%	13.8V DC ±15%
Dimensions (projections not included; W×H×D)	178.9×113.9×113.8 mm; 7.04×4.48×4.48 in	180×82×119.9 mm; 7.09×3.23×4.72 in	216×79×125 mm; 8.5×3.11×4.92 in	180×82×119.9 mm; 7.09×3.23×4.72 in	180×82×119.9 mm; 7.09×3.23×4.72 in	220×110×109.4 mm; 8.66×4.33×4.81 in
Weight (approx.)	1.4kg; 3.09 lb	1.2kg 2.65 lb	Main unit 830g; 1.83 lb HM-195 400g; 14.1 oz	1.2kg; 2.65 lb	1.2kg; 2.65 lb	1.4kg; 3.1 lb
Current drain	Transmit (High)	5.5A	5.5A	5.5A	5.5A	5.5A
	Max. audio	5A typ. (Ext SP, RX hailer ON) 1.5A (Internal SP)	5A typ. (Ext SP, RX SP ON) 1.5A (Internal SP)	3.5A	1.5A	1.5A
Sensitivity (at 12dB SINAD)	0.22µV typical	0.22µV typical	0.22µV typical	0.22µV typical	0.22µV typical	0.22µV typical
Intermodulation rejection	80dB typical	More than 70dB	More than 70dB	More than 70dB	More than 70dB	More than 80dB
Audio output power (10% distortion/4Ω load)	15W (External SP)	10W (External SP)	10W (External SP) 2W (HM-195 series)	4.5W typical	4.5W typical	5W typical
RF output power	25/1W	25/1W	25/1W	25/1W	25/1W	25/1W
NMEA interface	NMEA 2000*/0183	NMEA 0183	NMEA 0183	NMEA 0183	NMEA 0183	NMEA 0183
AIS receiver	Built-in*	External	External	External	External	External
GPS receiver	External	Built-in	External	Built-in	External	External

Measurements made in accordance with TIA/EIA 603. * Depending on version.

AIS TRANSPONDER AND AIS RECEIVER

	MA-500TR	MXA-5000
Frequency range (Unit: MHz)	161.975, 162.025 (default), 156.025–162.025	Rx: 161.975, 162.025 Simultaneous reception
Type of emission	16K0GXW (GMSK)	16K0F1D (GMSK)
Power supply requirement	12.0V DC (9.6–15.6V)	12.0V DC (10.8–15.6V)
Dimensions (projections not included; W×H×D)	165×110×123 mm; 6.5×4.33×4.84 in	132×34×155 mm; 5.2×1.34×6.1 in
Weight (approx.)	1.0kg; 2.2lb	400g; 14.1oz
Current drain	Transmit	1.5A
	Receive	0.7A
Sensitivity (20% error rate)	–110dBm	–116dBm typ.
Intermodulation rejection	65dB	65dB
RF output power	2W	–

Measurements made in accordance with IEC62287-1.

GPS RECEIVER

	MXG-5000S
Receiving frequency	1575.42MHz
Receiving channels	66
Receiving code	L1, C/A-codes, SPS
Satellite differential type (SBAS)	WAAS, EGNOS, MSAS, GAGAN
Time to first fix	Cold start
	Warm start
Power supply	4.75–5.25V DC (Supplied from MA-500TR or MXP-5000)
Dimensions (Diameter×Height) (projections not included)	78×96.5 mm; 3.07×3.8 in
Weight (approx.)	460g; 1.01lb
Usable temperature range	–20°C to +60°C; –4°F to +140°F
Cable length (approx.)	10m; 32.8ft

MARINE RADARS

	MR-1210RII MR-1210TII MR-1210TIII
Display	12.1-inch color TFT LCD
Resolution (H × V)	600×800 dots
Minimum range	25m (at 1/8 NM range)
Maximum range	36 NM (MR-1210RII)
	48 NM (MR-1210TII)
	72 NM (MR-1210TIII)
Power supply requirement	10.2–42V DC
Dimensions (projections not included; W×H×D)	300×323×119.2 mm; 11.81×12.72×4.69 in
Weight (approx.)	4.6kg; 10.1lb
Usable temperature range	–15°C to +55°C; 5°F to +131°F
Power consumption (approx.)	60W (MR-1210RII)
	70W (MR-1210TII)
	80W (MR-1210TIII)

HF MARINE TRANSCEIVER

	IC-M802
Frequency range (Unit: MHz)	Tx: 1.6–2.9999, 4.0–4.9999, 6.0–6.9999, 8.0–8.9999, 12.0–13.9999, 16.0–17.9999, 18.0–19.9999, 22.0–22.9999, 25.0–27.5000 Rx: 0.5–29.9999
Type of emission	J3E (USB/LSB), H3E*1, J2B (AFSK), F1B (FSK), A1A (CW), J2B (DSC)*2
Power supply requirement	13.6V DC 15% (negative ground)
Dimensions (projections not included; W×H×D)	Main unit: 240×94×238.4 mm; 9.45×3.7×9.39 in Controller: 220×110×84.4 mm; 8.66×4.33×3.32 in
Weight (approx.)	Main unit: 4.7kg; 10.4lb, Controller: 570g; 1.3lb
Current drain	Transmit (High)
	Receive
Sensitivity (at 10dB S/N)	J3E, A1A, J2B, F1B : 0.5µV (1.8–29.999MHz) H3E : 3.2µV (1.8–3.999MHz) DSC (J2B)*2 : 0.5µV (1% error rate)
Audio output power (10% dist./ 4Ωload)	4.0W
RF output power	150/60/20W

*1 Receive only for USA version. *2 USA version only.

	MR-1210RII	MR-1210TII	MR-1210TIII
Scanner unit			
Type	2ft (60cm) radome	4ft (120cm) open array	
Peak output power	4kW	4kW	6kW
Rotation speed	24, 36 rpm typical	24, 36 rpm typical	22, 24, 36 rpm typical
Beamwidth	Horizontal	2° typ.	
	Vertical	20° typ.	
Side lobe	–22dB typ.	–24dB typ.	
Transmission frequency	9410MHz ±30MHz	9410MHz ±30MHz	
Dimensions (projections not included; W×H×D)	640×256×640 mm; 25.2×10.08×25.2 in	1217 (diameter)×395 (H) mm; 47.91 (diameter)×15.55 (H) in	
Weight (approx.)	8kg; 17.6lb	18kg; 39.7lb	
Usable temperature range	–25°C to +70°C; –13°F to +158°F	–25°C to +70°C; –13°F to +158°F	
Connection cable	15m; 49.2ft (OPC-2341, standard)	20m; 65.6ft (OPC-2342, standard)	
	20m; 65.6ft (OPC-2339, option)	30m; 98.4ft (OPC-2340, option)	
	30m; 98.4ft (OPC-2340, option)		



IP ADVANCED RADIO SYSTEM

Full-Duplex Communication That Works Over a Wireless LAN and IP Network

System Features

Wireless Communication System between Ship Crews

By deploying access points along the existing IP network, the IP advanced radio system can communicate throughout in the vessel. The IP100H can access the nearest access point and can roam between access points.

Individual, Group or Area Communication

The IP100H/IP100FS can make individual call, group conference call, all call and area call. Crews spread across multiple rooms and cabins can communicate seamlessly. The IP communication terminal can receive Short Data Messages with a vibration alert from a PC-installed IP100FS.


Hands-free, Full-duplex Communication

With an optional earphone-microphone*, the IP100H user can simultaneously talk and receive like a phone call. Hands-free operation allows your staff to carry out other tasks at the same time.

* Either optional, HM-153LS, HM-166LS or HS-85 with OPC-2144 is required.

Interconnect between VHF Marine Transceiver and Public Address System

With the VE-PG3 RoIP gateway, the IP advanced radio system can interconnect with a VHF marine transceiver and a public address system.

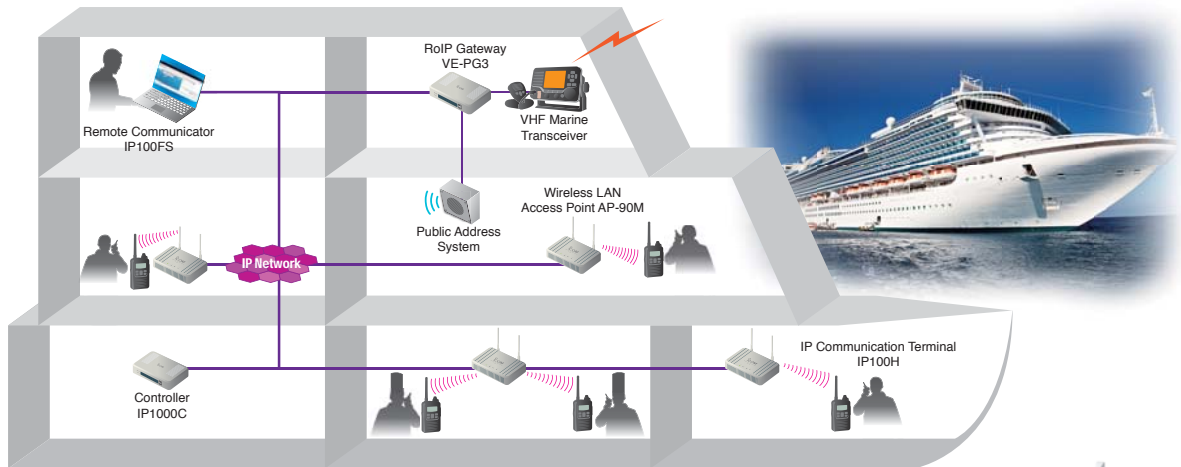

IP Communication Terminal **IP100H**

- License-free communication terminal using IEEE 802.11 a/b/g/n standards
- WPA-PSK or WPA2-PSK encryption
- IPX7 waterproof (1m depth water for 30 minutes)
- Compact 58x95x26.4mm body and 205g (approximate) light weight
- Vibration alert function for incoming calls



Wireless LAN Access Point **AP-90M**

- IEEE 802.11 a/b/g/n/ac compliant
- PoE (Power over Ethernet) capability
- Optional RS-AP3, access point management software



Controller **IP1000C**

- The IP1000C controls all terminal configurations and voice traffic
 - Capable of controlling up to 100 or 20* terminals (including IP100FS)
- *Depending on version.



Remote Communicator Software **IP100FS**

(Supplied with USB flash drive for use as a USB hardware key)

- The IP100FS can communicate with IP communication terminals from a PC
- The IP100FS can obtain location information of each IP100H based on using access points
- Can be installed on a Windows® based tablet PC as well as laptop PC



RoIP Gateway **VE-PG3**

- Interconnects IP advanced radio system and conventional radio system*
- Public address system connection
- Telephone interconnection with IP phone and PSTN lines

*Interconnection with VHF marine radio may be prohibited in some countries. Please confirm legal requirements in your country before installation.





System Overview

The MarineCommander™ is Icom's marine navigation system, which integrates various marine modules such as a fish finder, marine radar, AIS and VHF transceiver into the multi-function display (MFD).



Affordable Dual Display Connection Up to Four Displays in a System

The MarineCommander allows you to connect two MFDs simultaneously. All connected modules including chart data, fish finder and marine radar can be shared with two MFDs and provide separate operation. When connecting two MarineCommanders via a data cable, up to 4 displays can be used and C-MAP™ chart data can be shared in the system.



Daylight Viewable Display

The 12.1-inch size MFD provides 800x600 pixels resolution. The 900cd/m² color LCD with anti-reflecting surface coating glass offers bright, vivid indication in detail – even under direct sunlight.



C-MAP™ MAX Compatible

The MarineCommander is compatible with the C-MAP™ MAX chart by JEPPESEN in an SD card format*. The MarineCommander provides quick and fast responding rendering performance. The C-MAP™ MAX chart provides guardian alarm, route-check, perspective view and Port database for your safe and easy navigation.




* Chart data is not supplied from Icom.



Perspective view (bird view)



Chart plotter



Object information of the C-MAP™ chart data base




Nav-course monitor (upper right) & Nav-waypoint (bottom right)



Marine Radar

The MXR-5000R/T marine radar provides clear target discrimination. Waypoint and AIS target can be overlaid on the radar screen. The marine radar helps collision avoidance and increases your safety at sea. The radar images can be overlaid on the plotter screen in the same scale and helps you to detect dangerous objects.

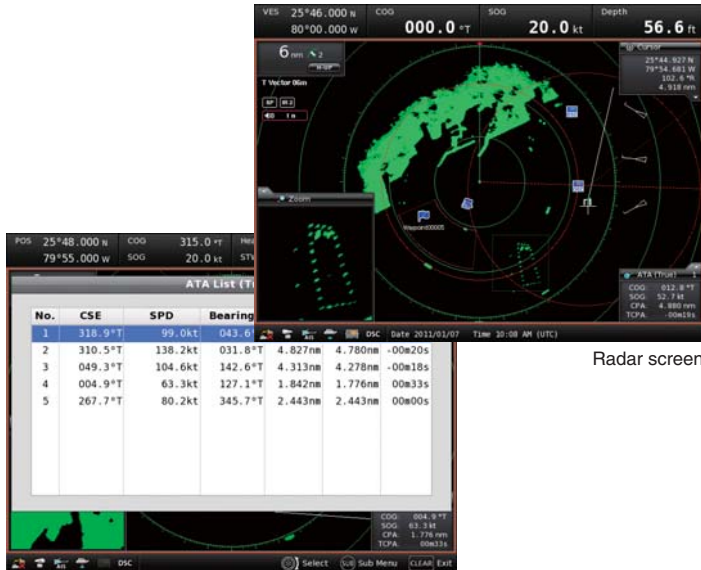

Radar screen

ATA list


Simplified ATA (Automatic Tracking Aid)

The simplified ATA function allows you to plot up to 10 targets and the radar continues to track the targets automatically. The ATA targets can be overlaid on the plotter screen.



Fish Finder

When a fish finder module is connected, the MarineCommander system can have a dual frequency sounder function. Using the 50kHz/200kHz dual frequency mode, the MarineCommander enhances the separation and helps in fish detection.

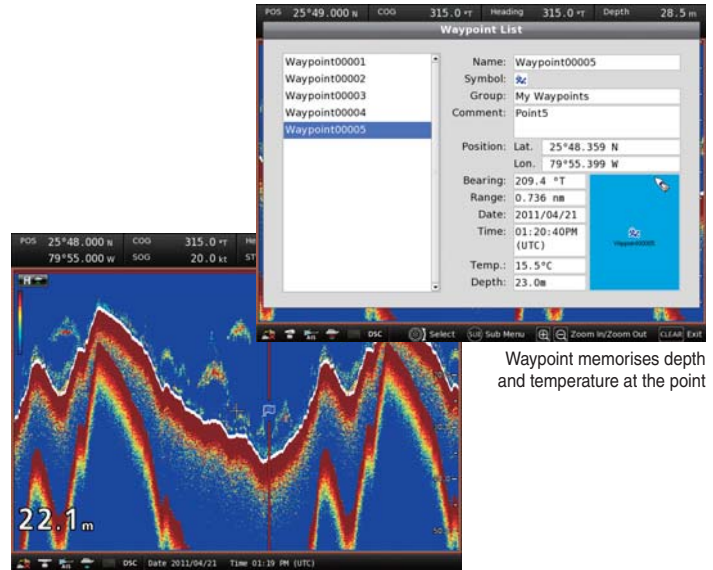

Sounder screen

Waypoint memorises depth and temperature at the point

Additional data for waypoints

When used with the fish finder module, the MarineCommander memorizes the waypoint information with depth and temperature data.

MARINE RADAR MXR-5000T

- 4kW, 4 feet (120cm) open array scanner
- Up to 48NM observation • 48 rpm high-rotation speed



Radar main unit



MARINE RADAR MXR-5000R

- 4kW, 2 feet (60cm) radome scanner
- Up to 36NM observation • 48 rpm high-rotation speed



Radar main unit

FISH FINDER MXF-5000



EX-3193

- 600W transom transducer
- Depth, speed and temperature in one housing
- 50kHz and 200kHz dual frequency



EX-3194

- 600W thru-hull transducer
- Depth, speed and temperature in one housing
- 50kHz and 200kHz dual frequency



EX-3195

- 1kW thru-hull transducer
- Depth and fast-response water temperature sensor
- 50kHz and 200kHz dual frequency





AIS (Automatic Identification System)

AIS (Automatic Identification System) receives real-time vessel traffic information broadcasted by other AIS equipped vessels. Using the optional MA-500TR or MXA-5000, the AIS data can be overlaid on the plotter and radar screen.



Full AIS data



AIS TRANSPONDER
MA-500TR




AIS RECEIVER
MXA-5000



VHF Transceiver

The MarineCommander has the capability to be connected to compatible Icom VHF transceivers.* Various types of DSC calls, including individual, group, all ship, position and polling request*, can be initiated from the MarineCommander. Received DSC messages and position information can be shown on the plotter display.

* Type of transmitting DSC calls are depending on the connected VHF transceiver's capability.

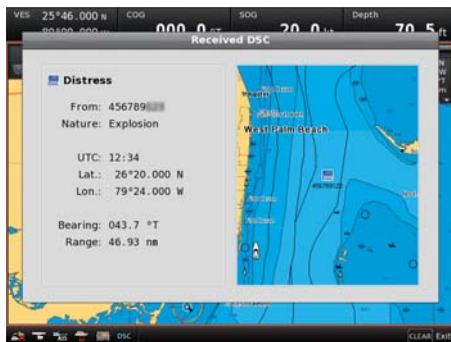

Received DSC message



VHF MARINE TRANSCEIVER
IC-M506



VHF MARINE TRANSCEIVER
IC-M424G



VHF MARINE TRANSCEIVER
IC-M400BB



VHF MARINE TRANSCEIVERS
IC-M324G/M324



VHF MARINE TRANSCEIVER
IC-M604A



GPS Receiver

The MXG-5000S is a 66 channel GPS receiver with WAAS, EGNOS MSAS and GAGAN differential corrections. It offers accurate position information and features IPX6 high-pressure water jet resistance.



GPS RECEIVER
MXG-5000S



Engine Monitoring

When connected to an NMEA 2000 engine interface, the MarineCommander shows current data on a virtual engine meter.



Graphic screens



USB Flash Drive Connection

The MFD has a USB slot to connect with a USB flash drive. Waypoint, track and route information and memo data can be backed up to a USB flash and imported to other MarineCommanders or a PC.



SD card slot (above) and USB slot

Other Features

- An analogue RGB output connector (D-SUB 15-pin) for an external display connection
- Four analog video input (NTSC or PAL format)
- Multiple language display (English/French/Spanish)
- External NMEA 2000 Connection (Engine, Fuel, Engine Temperature, Wind, GPS, Compass, STW)
- Simulator mode can demonstrate key system functions using only the MXP-5000 and MXD-5000.
- Memo function allows you to store a comment with picture data* and position information.

* To show picture data, the picture data must be stored in the connected USB flash drive.

This product includes software (part of tcp_wrappers) developed by the University of California, Berkeley. This product includes software developed by the University of California, Berkeley and its contributors.

Specifications

MULTI-FUNCTION DISPLAY

	MXD-5000
Multi-function display	12.1-inch TFT
Screen size	246x184.5 mm
Screen resolution	SVGA 800x600 dots
Power supply	30V DC (Supplied from MXP-5000)
Dimensions (WxHxD) (projections not included)	386x274x69.2 mm; 15.2x10.79x2.72 in (without bracket) 404x299x102 mm; 15.91x11.77x4.02 in (with bracket)
Weight (approx.)	3.6kg; 7.94lb (without bracket) 4.1kg; 9.04lb (with bracket)
Usable temperature range	-20°C to +60°C; -4°F to +140°F
Waterproofing	IPX7
Cable length	5m; 16.4ft
Optional extension cable	EX-3187 (5m; 16.4ft)

MAIN PROCESSOR UNIT

	MXP-5000
Power supply	12/24V DC (10.8 to 31.2V DC)
Current drain (at 12V DC) (at maximum brightness)	Less than 4.7A (One MXD-5000) Less than 7.7A (Two MXD-5000s)
Dimensions (WxHxD) (projections not included)	360x88x228.8mm; 14.17x3.46x9.01 in
Weight (approx.)	4.25kg; 9.37lb
Usable temperature range	-20°C to +60°C; -4°F to +140°F
Waterproofing	IPX4

FISH FINDER

	MXF-5000
Power supply	12/24V DC (10.8 to 31.2V DC)
Current drain (at 12V DC)	Less than 0.6A (Water depth range: 40m, output power 600W) Less than 1.0A (Water depth range: 40m, output power 1kW)
Output power	600W/1KW
Transmission frequency	50kHz ±1kHz 200kHz ±1kHz
Dimensions (WxHxD) (projections not included)	250x67x200 mm; 9.84x2.64x7.87 in
Weight (approx.)	2.18kg; 4.8lb
Usable temperature range	-20°C to +60°C; -4°F to +140°F
Waterproofing	IPX4
Optional data cable	OPC-1895 (20m; 65.6ft)

TRANSDUCERS

	EX-3193	EX-3194	EX-3195
Type	600W transom type, built-in boat speed and temperature sensors	600W thru-hull type, built-in boat speed and temperature sensors	1kW thru-hull type, built-in temperature sensors
Output power	600W	600W	1kW
Operating frequency	50kHz, 200kHz	50kHz, 200kHz	50kHz, 200kHz
Beamwidth	50kHz: 45°, 200kHz: 11°	50kHz: 45°, 200kHz: 11°	50kHz: 15°x21°, 200kHz: 3°x5°
Vessel speed sensor	18,000 p/nm	19,000 p/nm (with fairing) 21,500 p/nm (without fairing)	-
Speed range	1kt-44kt	1kt-44kt	-
Weight (approx.)	0.5kg; 1.1lb	2.5kg; 5.5lb	3.6kg; 7.9lb
Optional transducer ext. cable	OPC-1929 (6m; 19.7ft)	OPC-1929 (6m; 19.7ft)	OPC-1929 (6m; 19.7ft)

All stated specifications are subject to change without notice or obligation.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries. SUBMERSIBLE PLUS, COMMANDMIC, AQUAQUAKE and MarineCommander are trademarks of Icom Inc. (Japan) C-MAP is a trademark of Jeppesen.

NMEA 2000 is a trademark of the National Maritime Electronics Association, Inc. Windows is either registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

Icom Inc.

1-1-32, Kami-minami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

Count on us!

Icom America Inc.

12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-0
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine,
1 Rue Brindejonc des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>

Your local distributor/dealer:

Icom Canada

Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Brazil

Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrazil.com

Icom (UK) Ltd.

Blacksole House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Icom New Zealand

39C Rennie Drive, Airport Oaks,
Auckland, New Zealand
Phone: +64 (09) 274 4062
Fax: +64 (09) 274 4708
E-mail: inquiries@icom.co.nz
URL: <http://www.icom.co.nz>

RADAR UNITS

	MXR-5000R	MXR-5000T
Power supply	12/24V DC (10.8 to 31.2V DC)	12/24V DC (10.8 to 31.2V DC)
Current drain (at 12V DC)	Less than 5.0A	Less than 5.5A
Dimensions (WxHxD) (projections not included)	250x67x200 mm; 9.84x2.64x7.87 in	250x67x200 mm; 9.84x2.64x7.87 in
Weight (approx.)	2.1kg; 4.6lb	2.1kg; 4.6lb
Usable temperature range	-20°C to +60°C; -4°F to +140°F	-20°C to +60°C; -4°F to +140°F
Waterproofing	IPX4	IPX4
Optional data cable	OPC-1895 (20m; 65.6ft)	OPC-1895 (20m; 65.6ft)

SCANNER UNITS

	MXR-5000R Radome scanner	MXR-5000T Open array scanner
Type	2ft (60cm) radome	4ft (120cm) open array
Peak output power	4kW	4kW
Maximum range	36NM	48NM
Rotation speed	24 rpm, 36 rpm, 48 rpm	24 rpm, 36 rpm, 48 rpm
Beam width	Horizontal Vertical	Horizontal Vertical
Side lobe	-18dB	-24dB
Polarization	Horizontal	Horizontal
Transmission frequency	9410MHz±30MHz P0N	9410MHz±30MHz P0N
Pulse width	80ns/2880Hz, 80ns/2160Hz, 250ns/2160Hz, 350ns/2160Hz, 900ns/720Hz	80ns/2880Hz, 80ns/2160Hz, 250ns/2160Hz, 350ns/2160Hz, 900ns/720Hz
Dimensions	607 (Diameter)x243 (H) mm; 23.9x9.57 in	1205 (Diameter of rotation) x381 (H) mm; 23.9x15 in
Weight (approx.)	8kg; 17.6lb (without cable)	17kg; 37.4lb (without cable)
Usable temperature range	-25°C to +70°C; -13°F to +158°F	-25°C to +70°C; -13°F to +158°F
Relative humidity	Less than 95% at 40°C	Less than 95% at 40°C
Waterproofing	IPX6	IPX6
Supplied system cable	OPC-2341 (15m; 49.2ft)	OPC-2342 (20m; 65.6ft)
Optional radar system cables	OPC-2339 (20m; 65.6ft) OPC-2340 (30m; 98.4ft)	OPC-2340 (30m; 98.4ft)